

APPROVED	O.G. FIG.
BY	CLASS
DRAFTSMAN	SUBCLASS

372 36

Fig. 1A


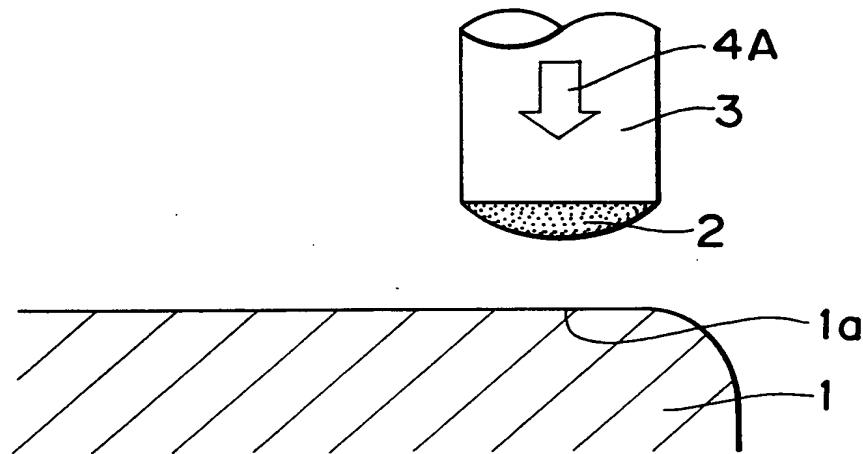


Fig. 1B

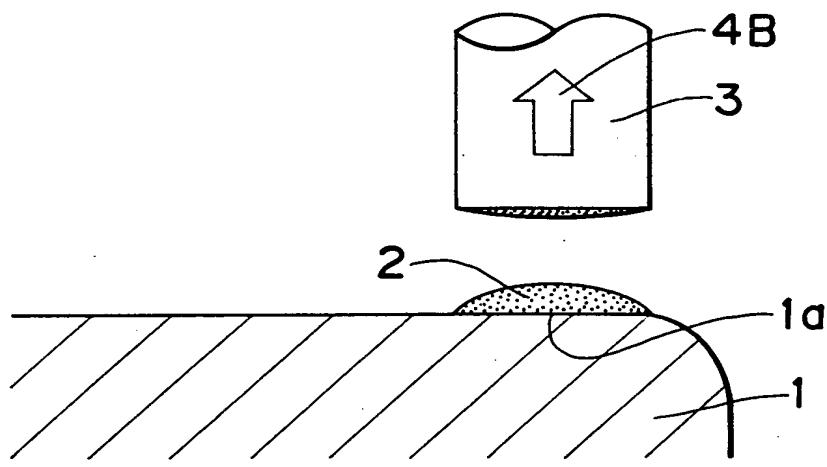

APPROVED	O.G. FIG.
BY	CLASS
DRAFTSMAN	SUBCLASS

Fig. 2A

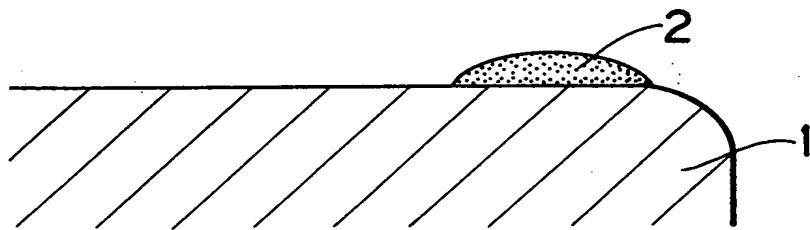


Fig. 2B



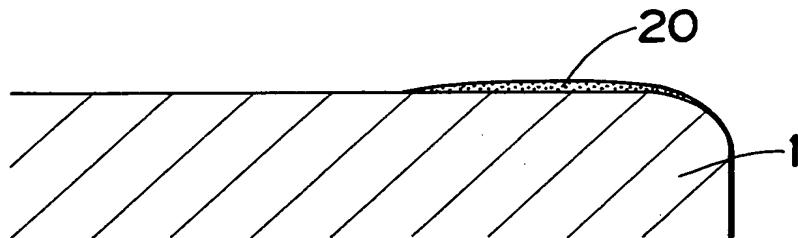


Fig. 3

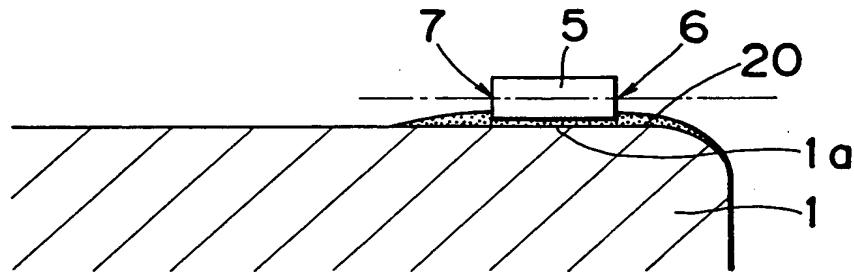

APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

Fig. 4

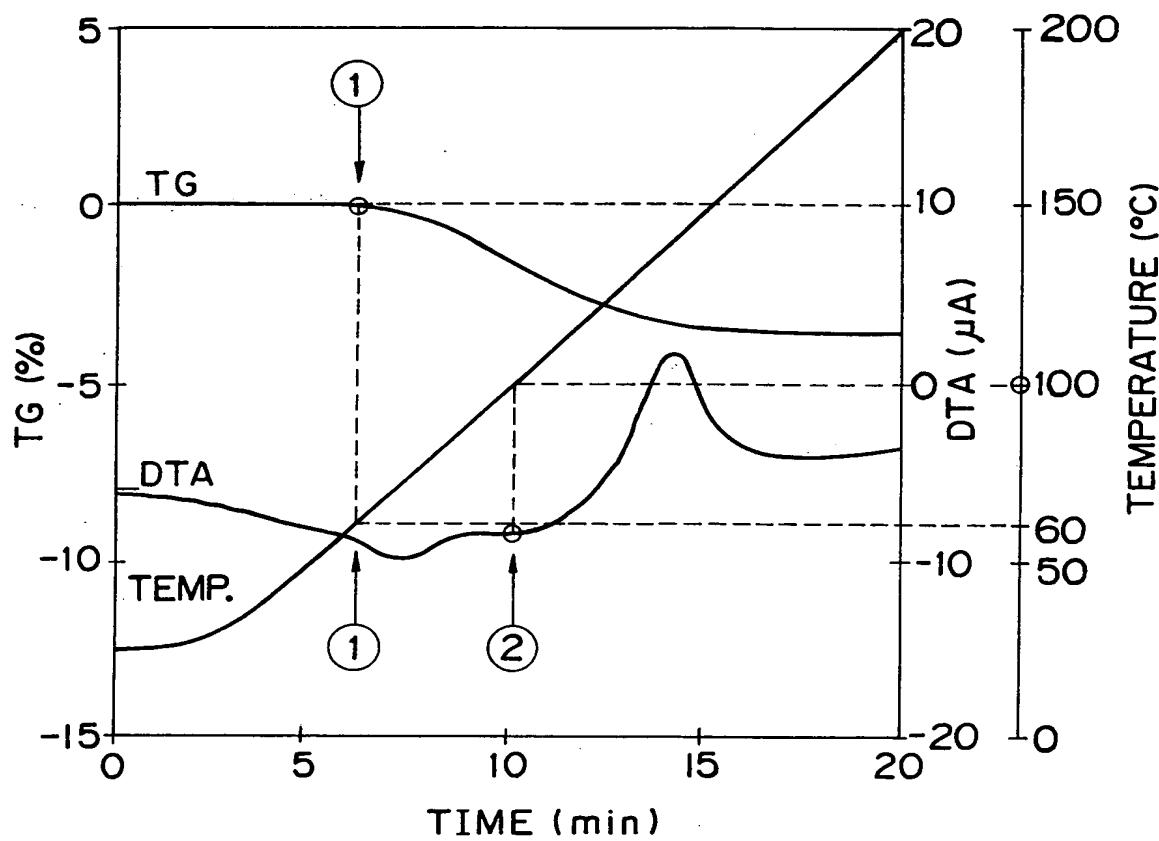

- ①: POINT AT WHICH DILUENT STARTS TO TRANSPIRE (60°C)
- ②: POINT AT WHICH RESIN STARTS THERMO SETTING REACTION (100°C)

APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

Fig.5 PRIOR ART


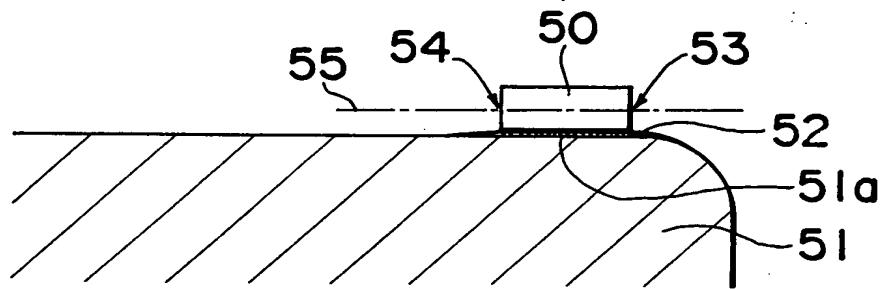


Fig.6 PRIOR ART

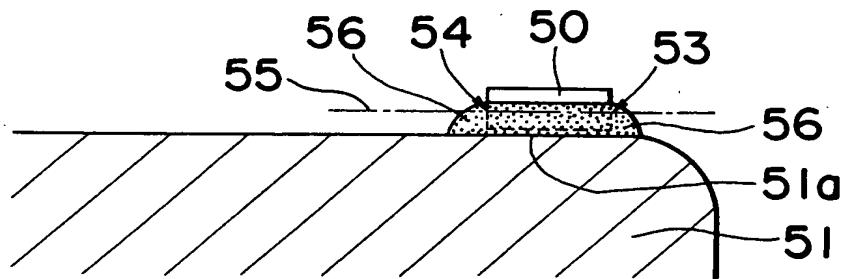

APPROVED BY	O.G. FIG.
	CLASS SUBCLASS
DRAFTSMAN	

Fig. 7A PRIOR ART


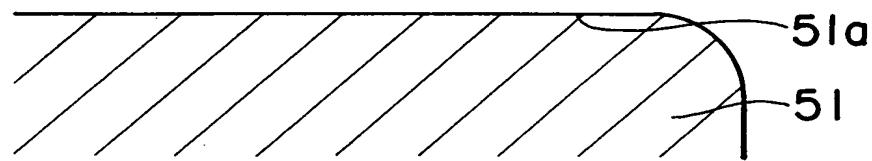


Fig. 7B PRIOR ART

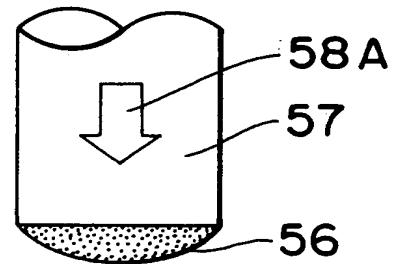